

Bravi Lite



And work just became fun again...


This all-new platform from Bravi uses proven technology and yet is **MORE COMPACT** and **EVEN LIGHTER** than most currently available platforms; it also boasts a **LOWER COST OF OWNERSHIP**.

And better still, the BRAVI LITE retains the strength, reliability and versatility that our customers have come to expect from a Bravi platform.


At a glance:

- Self-propelled - It drives at a full working height of 4.2 mtrs! Class leader in sector
- Lightweight - It weighs under 400 Kilos. Ideal for use on raised access floors
- Compact - It is more compact at only 1.1 mtrs x 0.77 mtrs x 1.5 mtrs
- Green – environmentally friendly from manufacturing to utilization



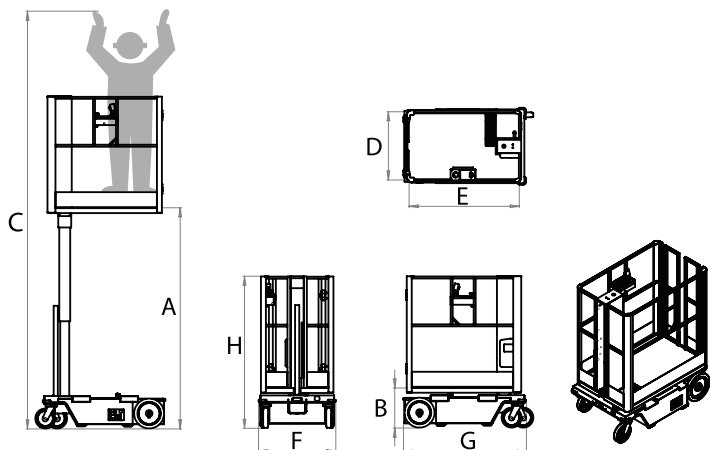

ZERO
Inside Turning Radius
and 1350 mm (53")
Outside Turning Radius



- Swing entry gate with stainless steel hinges and integral toeboard for safe and easy access to the platform
- Integral fork pockets make light work of transporting the Lite
- Easy to use joystick operates fully proportional lift and drive for precise and easy manoeuvrability
- Low platform entry height for easier access
- Direct electric drive gives unbeatable usage between recharges
- Simple control system for ease of use
- Minimal componentry makes the Lite a perfect addition to your fleet
- Reinforced all-steel powder-coated chassis and cage means the Lite with withstand the harshest of work environments
- Proven Easy-Load system, provides increased ground clearance for use on steep ramps /uneven work sites.

Technical Data	Metric	US
Platform Height Elevated	2210 mm	A 7ft 3in
Platform Height Lowered	398 mm	B 1ft 3in
Max Working Height	4210 mm	C 14ft
Platform Width	682 mm	D 2 ft 2 in
Platform Length	1101 mm	E 3 ft 7 in
Base Width	772 mm	F 2 ft 6 in
Base Length	1232 mm	G 4 ft
Stowed Height	1525 mm	H 5 ft
Maximum Capacity	1-person + tools 180kg 397lbs	1-person + tools 180kg 397lbs
Total Transport Weight CE	398 kg	877lbs
Total Transport Weight ANSI	438 kg	965 lbs
Gradeability	35%	35%
Inside Turning Radius	Zero	Zero
Batteries	2-12V; 85Ah@20h	2-12V; 85Ah@20h
Power source	110/220v	110/220v
Max drive speed (lowered)	3km/h	1,9km/h
Elevated Drive Speed	0.6km/h	0.35mph
STANDARD COMPLIANT	Ansi A92.6, CE Compliant, AS1418.10 (int)	



Compact & Powerful



Integral fork pockets

